



HURAKAN

Refrigerator Reach-In HKN-MRC56R3S

Item #: HKN-MRC37R2S Project: _____
Qty: _____ Date: _____ Approval: _____



Features

- ✓ Pre-coated steel exterior; aluminum interior
- ✓ Ventilated, no-frost cooling with automatic defrost
- ✓ Digital CAREL thermostat for precise control
- ✓ Operating range: 32–44.6°F
- ✓ Vertical LED interior lighting
- ✓ Sliding self-closing doors (double-pane tempered glass)
- ✓ Heated sliding doors with tempered glass
- ✓ Heated double-pane tempered glass
- ✓ Adjustable white-painted wire shelves

Lock & casters (brakes); R290, ETL

Technical Data

Width	80 $\frac{7}{8}$ Inches
Depth	29 $\frac{1}{8}$ Inches
Height	82 $\frac{7}{8}$ Inches
Power Cord Length	118 Inches
Interior Width	76 $\frac{1}{8}$ Inches
Door Opening Width	20 $\frac{1}{8}$ Inches
Interior Depth	23 $\frac{1}{4}$ Inches
Interior Height	60 $\frac{3}{8}$ Inches



Instructions and images in this manual are only for reference and may differ from the actual product. Launch the E-Manual.



Technical Data


Hertz / Phase / Voltage	60 Hertz / 1 Phase / 110 V
Approval / Climate Class	ETL certified / Climate Class 3
Cooling Type	Ventilated
Capacity	50.1 cu.ft.
BTU (LBP)	2559 BTU
Evaporator	Finned Aluminum
Compressor Location	Bottom
Construction	Steel painted / Aluminum sheet
Door Style / Type	Sliding / Self-closing / Glass
Interior Light	LED, two sides
Handle / Lock	External / Yes
Installation Type	Free Standing
Horsepower	5/8 HP
Amps	9 A
Number of Doors	3 Doors
Number of Shelves	9 (white painted wire)
Plug Type	NEMA 5-15P
Wheels/Casters	4
Refrigerant Type	R-290
Style	Counter Height
Temperature Range	32–44.6 Degrees F
Style / Type	Vertical / Reach-In Refrigerator



HURAKAN

REFRIGERATOR
REACH-IN
HKN-MRC56R3S

Plan View

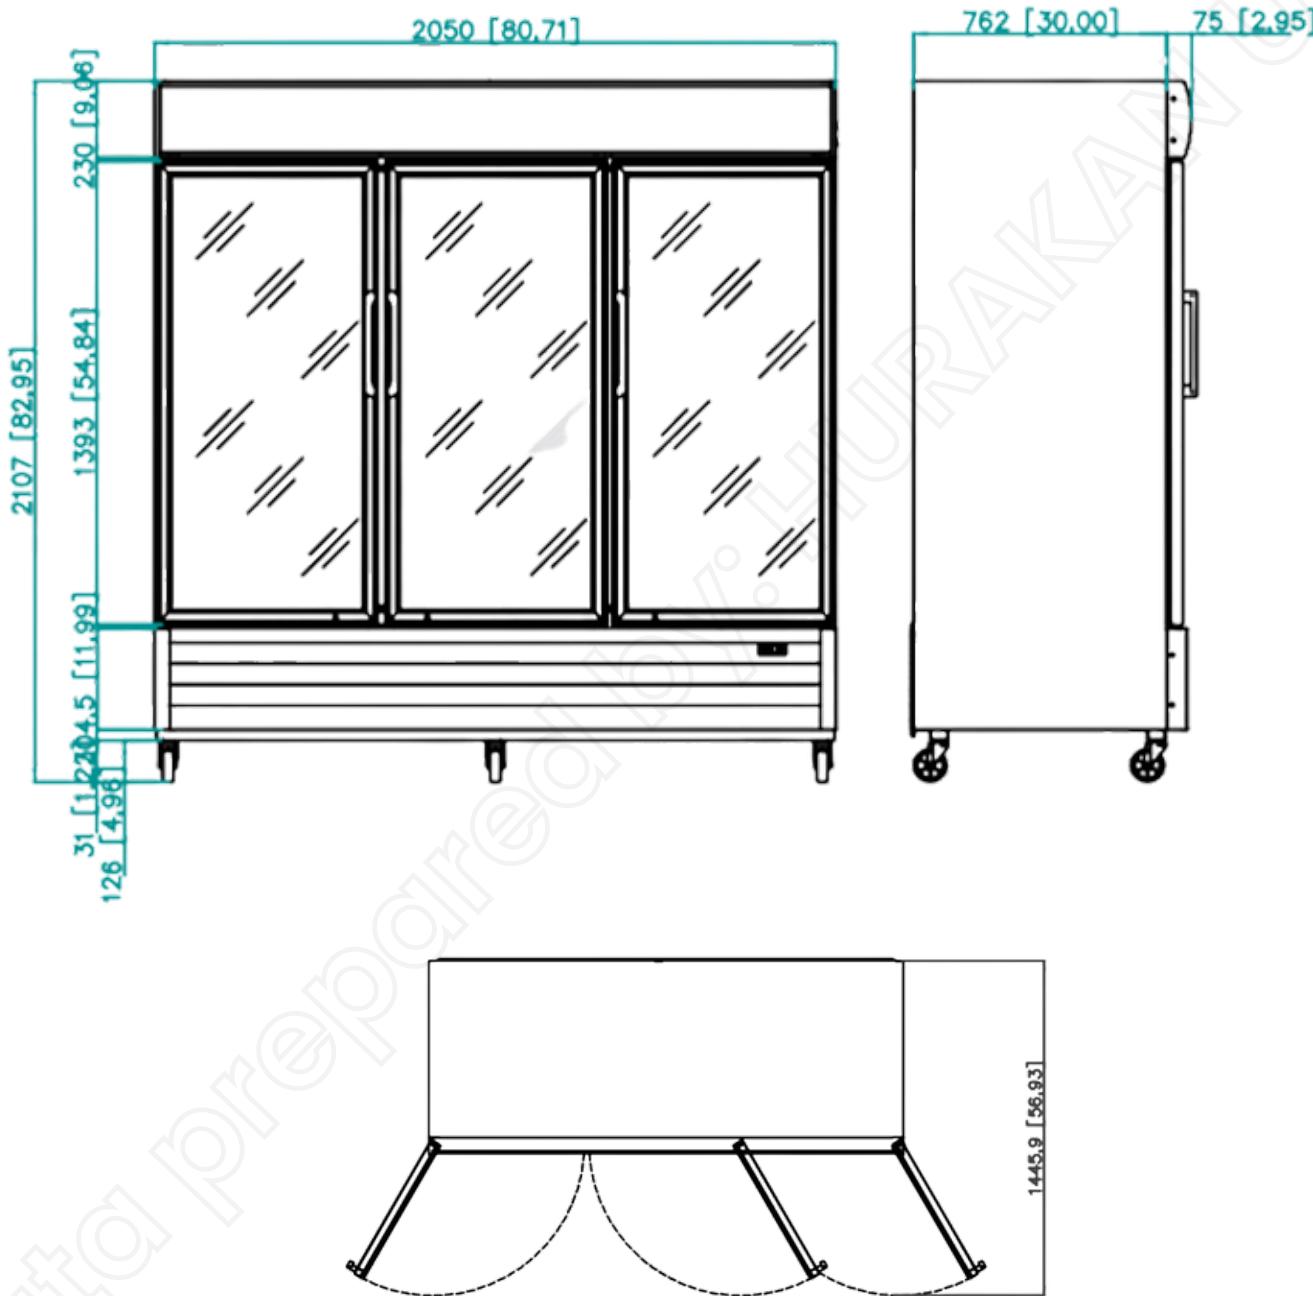



Notes & Details

These commercial upright coolers are designed to meet the demands of professional foodservice environments, providing a combination of durability, functionality, and visual appeal.

Available in one-door, two-door, and three-door configurations, each unit is constructed with a heavy-duty steel-painted exterior and an easy-to-clean aluminum interior.

The doors are equipped with tempered sliding glass panels, ensuring smooth operation, long service life, and excellent product visibility from any angle.

Integrated vertical LED lighting highlights stored items and enhances display appeal.

The bottom-mounted compressor improves cooling efficiency and provides a more accessible interior layout.

The ventilated cooling system guarantees uniform cold-air distribution throughout the cabinet, maintaining consistent storage temperatures.

A digital CAREL thermostat ensures precise temperature control within the range of 32–44.6°F, keeping beverages, packaged foods, or other perishable items at optimal storage conditions.

Self-closing sliding doors help maintain internal temperatures and minimize energy loss during operation.

Additional features include an external handle for easy use, built-in door locks for product security, and heavy-duty casters for effortless mobility and positioning in various commercial settings.

Each unit operates on an eco-friendly R290 refrigerant system, meeting modern environmental standards and energy-efficiency requirements.

Certified by ETL for safety and performance compliance, Hurakan coolers are a reliable solution for convenience stores, cafés, restaurants, and retail establishments seeking robust, high-quality refrigeration with a professional display presence.

ETL Sanitation



This product has been certified by ETL, a division of the Intertek Group, to meet applicable sanitation standards required for use in the United States and Canada.

5-15P



This unit comes with a NEMA 5-15P plug

ETL, US



This product has been certified by ETL, a division of the Intertek Group, to meet applicable electrical product safety standards required for use in the United States.