



HURAKAN

Undercounter Freezer HKN-UC61F2S

Item #: HKN-UC61F2S Project: _____

Qty: _____ Date: _____ Approval: _____

Features

- ✓ American-style undercounter design
- ✓ SS430 stainless exterior; pre-coated aluminum interior
- ✓ Reversible, self-closing doors (<90°)
- ✓ Magnetic gaskets keep cold in and are tool-free to replace; lock & key included
- ✓ Digital CAREL thermostat + EBM ventilated airflow hold -5.8-10.4°F evenly across shelves.
- ✓ Automatic defrost for consistent performance and low maintenance



Technical Data

Width	61 ¼ Inches
Depth	31 ¾ Inches
Height	38 inches
Power Cord Length	18 Inches
Interior Width	57 Inches
Interior Depth	25 ¾ Inches
Interior Height	28 ¾ Inches
Work Surface Height	38 Inches
Amps	4.5 A



ETL, US



5-15P



ETL Sanitation

Instructions and images in this manual are only for reference and may differ from the actual product. Launch the E-Manual.

www.equip.me



Technical Data


Hertz	60 Hz
Phase	1-Phase
Voltage	115 V
Access Type	Hinge (self-closing)
BTU (LBP)	
Capacity	14.1 cu.ft.
Compressor Location	Bottom
Compressor	NUG80NR (HUAYI)
Door Style	Hinge
Cooling Type	Ventilated
Features	
Theromstat	Digital / CAREL
Number of Doors	2 Doors
Number of Shelves	2 Shelves
Plug Type	NEMA 5-15P
Wheels/Castors	4 (2 with brakes)
Refrigerant Type	R-290
Defrosting	Automatic
Temperature Range	-5.8 ~ 10.4 F
Evaporator	Finned Aluminum
Type	Undercounter Freezer



HURAKAN

Undercounter Freezer
HKN-UC61F2S

Plan View

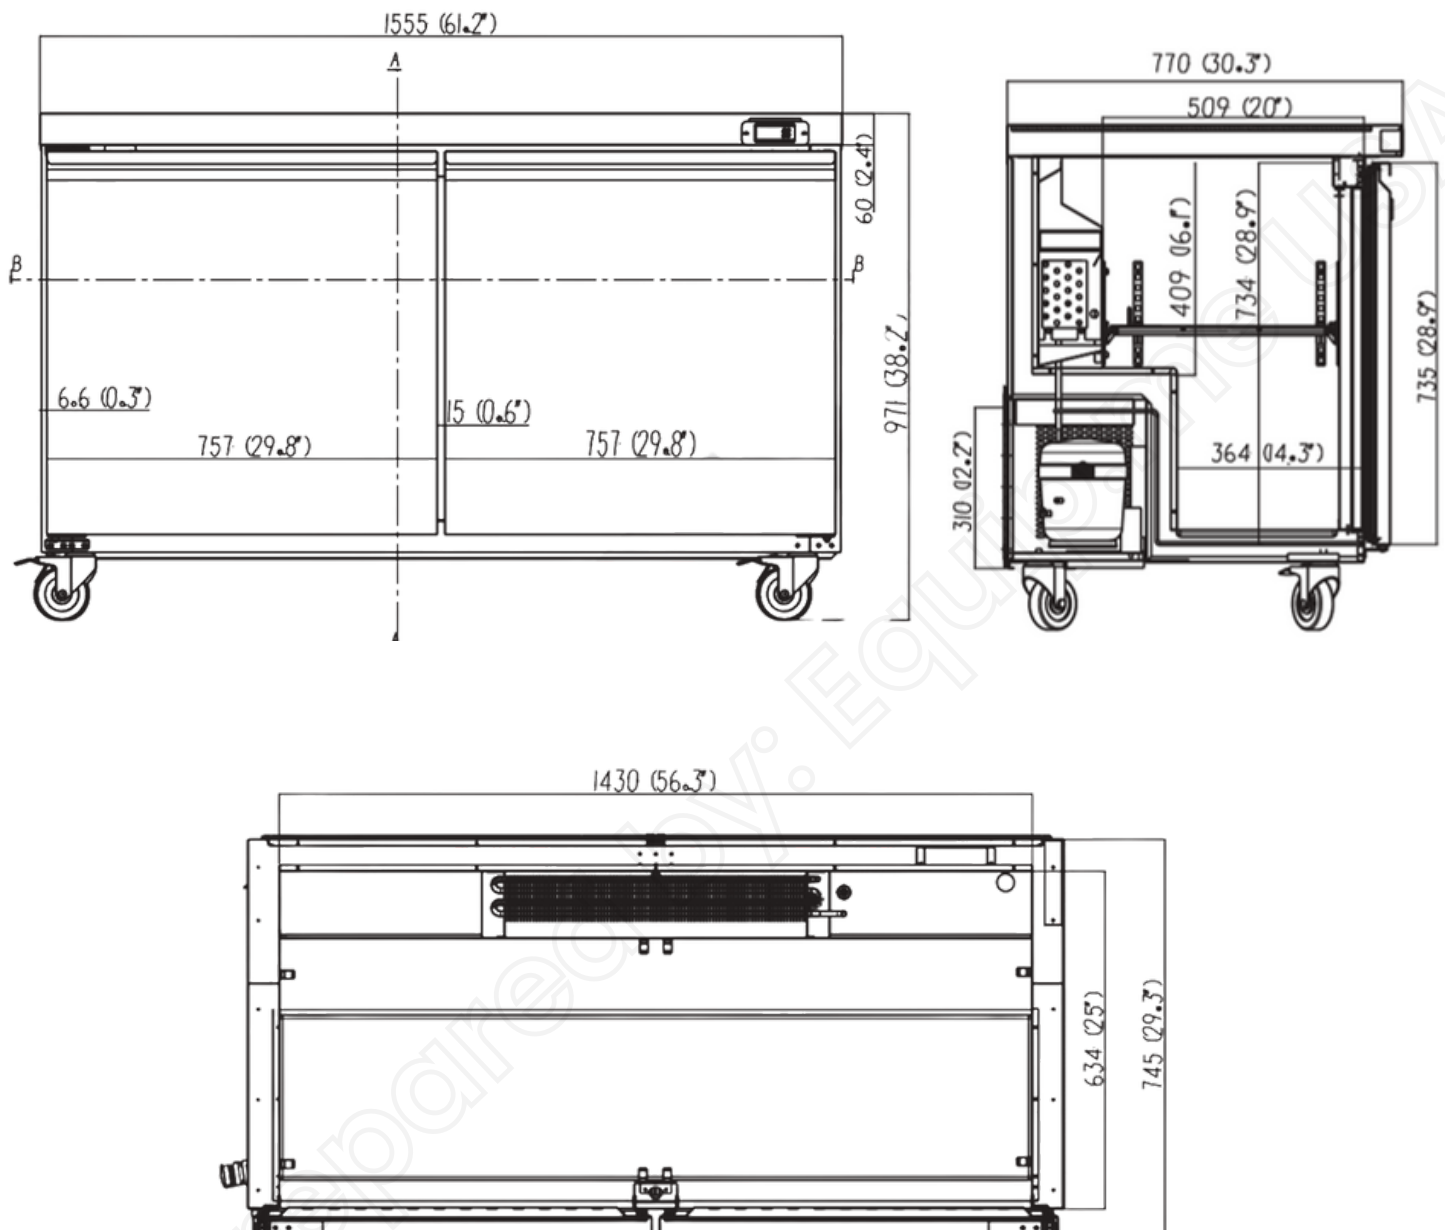



Notes & Details

Sleek American undercounter look that upgrades any cookline while maximizing workspace.

Cold you can trust: holds -10° to 10°F with ventilated, EBM-driven airflow for fast pull-down and even temperatures across every shelf.

Bottom-mount Embraco system + finned aluminum coil set and R290 refrigerant = strong performance with smart energy use.

Built to last & clean fast: SS430 stainless exterior, pre-coated aluminum interior, and curved interior corners for quick wipe-downs.

Keep the cold in: reversible, self-closing doors ($<90^{\circ}$) with magnetic gaskets; lock & key for product security.

Precision control: Digital Dixell thermostat with clear readout; automatic defrost prevents ice build-up and keeps performance consistent.

Operator-friendly sizing: 31 7/16" depth and 38 1/16" worktop height slide under standard counters; pick 48 7/16" or 61 1/4" width to fit your line.

Plug-and-play: 115V / 60 Hz / 1-phase, NEMA 5-15P—no special wiring required. Long 118 1/8" power cord for flexible placement.

Ready for the rush: adjustable shelves, heavy-duty hinges, and stainless casters with time-lock for easy moves and rock-solid stability.

Make it yours: optional custom front panel available to match your brand or décor.

ETL Sanitation



This product has been certified by ETL, a division of the Intertek Group, to meet applicable sanitation standards required for use in the United States and Canada.

5-15P



This unit comes with a NEMA 5-15P plug

ETL, US



This product has been certified by ETL, a division of the Intertek Group, to meet applicable electrical product safety standards required for use in the United States.