



HURAKAN

Freezer

Reach-In

HKN-MRC19F1S

Item #: HKN-MRC19F1S Project: _____
Qty: _____ Date: _____ Approval: _____



Features

Pre-coated steel exterior, aluminum interior
Ventilated cooling system for even temperature distribution
Digital CAREL thermostat for precise control
Operating range: 0°F to -8°F
Vertical LED interior lighting
Heated double-pane tempered glass
Adjustable white-painted wire shelves
Environmentally friendly refrigerant R290

Technical Data

Width	27 Inches
Depth	32 ½ Inches
Height	82 ⅞ Inches
Power Cord Length	118 Inches
Interior Width	22 ⅜ Inches
Right Door Opening Width	20 ⅞ Inches
Interior Depth	27 ⅝ Inches
Interior Height	60 ⅜ Inches



ETL, US



ETL Sanitation

Instructions and images in this manual are only for reference and may differ from the actual product. Launch the E-Manual.



Technical Data


Hertz / Phase / Voltage	60 Hertz / 1 Phase / 110 V
Approval / Climate Class	ETL certified / Climate Class 3
Cooling Type	Ventilated
Capacity	15.2 cu.ft.
BTU (LBP)	682 BTU
Evaporator	Finned Aluminum
Compressor	Cubigel x2
Construction	Steel painted / Aluminum sheet
Door Style / Type	Hinge (self-closing, right) / Glass
Interior Light	LED (vertical)
Handle / Lock	External / Yes
Installation Type	Free Standing
Horsepower	1/6 HP
Amps	3.5 A
Number of Doors	1 Door / Right
Number of Shelves	4 (white painted wire)
Plug Type	NEMA 5-15P
Wheels/Casters	4
Refrigerant Type	R-290
Style	Counter Height
Temperature Range	0°F to -8°F
Style / Type	Vertical / Reach-In Refrigerator



HURAKAN

FREEZER
REACH-IN
HKN-MRC19F1S

Plan View

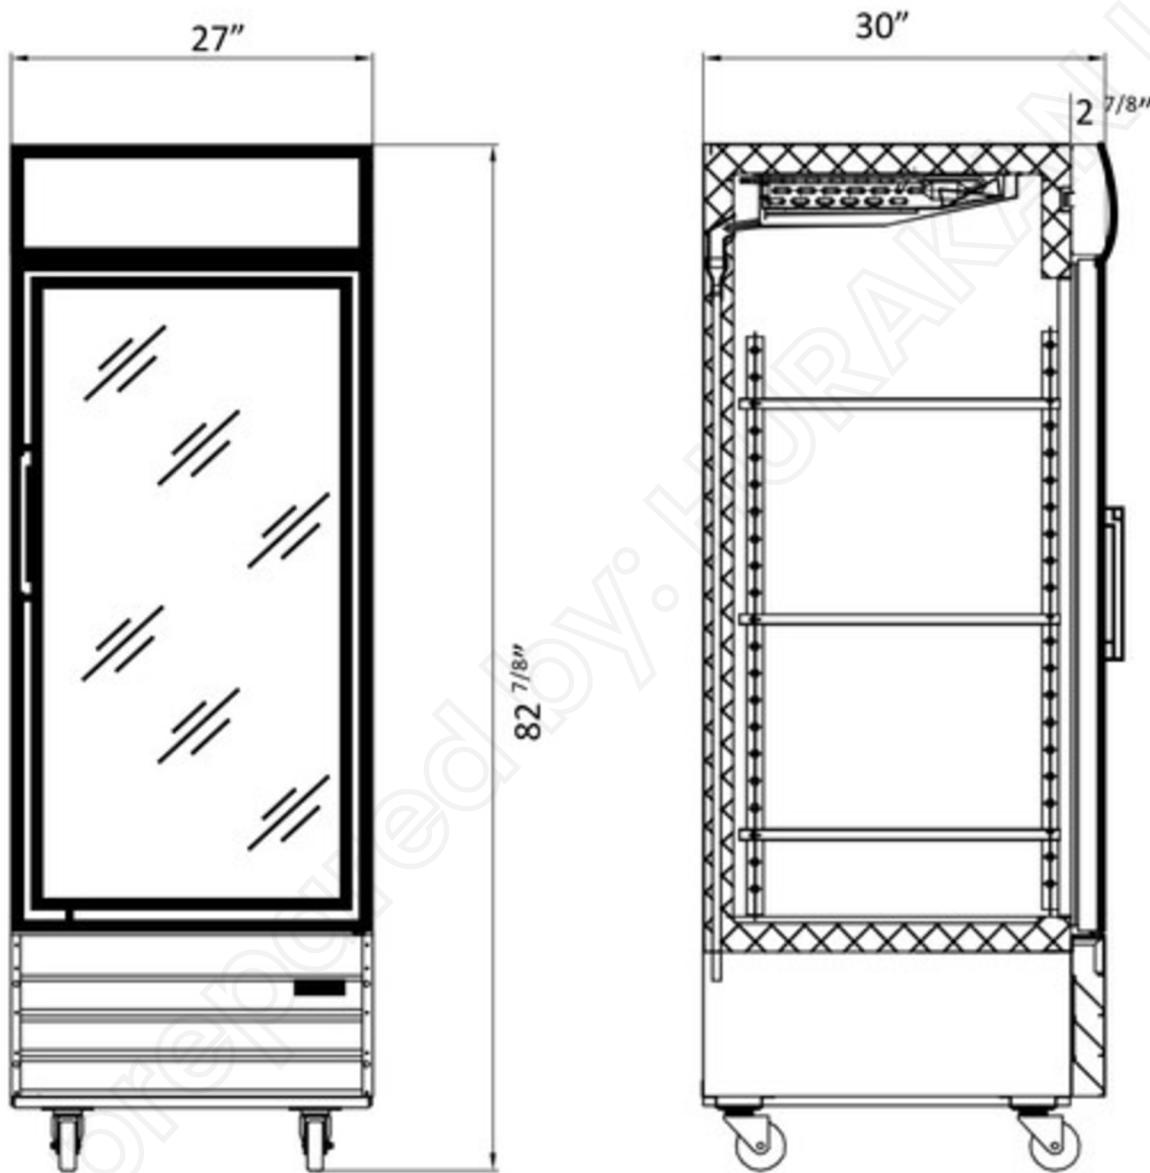



Notes & Details

These commercial upright freezers are designed to meet the demands of professional foodservice and retail environments, combining durability, reliable freezing performance, and a clean, modern appearance. The units are constructed with a heavy-duty pre-coated steel exterior and an easy-to-clean aluminum interior, ensuring long service life and hygienic operation. The hinged door is equipped with double-pane tempered glass, providing both thermal insulation and product visibility.

A bottom-mounted compressor improves system efficiency and helps maintain a more accessible interior layout. The ventilated cooling system ensures uniform cold air circulation throughout the cabinet, preventing temperature stratification and supporting consistent freezing performance. A digital CAREL thermostat allows precise temperature control within a low-temperature range of -18°C to -22°C (0°F to -8°F), making the unit suitable for frozen foods, ice cream, and other temperature-sensitive products.

Additional features include adjustable painted wire shelves for flexible storage configuration, self-closing doors to reduce cold air loss, and vertical interior LED lighting for clear product visibility. The freezer operates with an environmentally friendly R290 refrigerant, meeting modern energy and environmental standards. ETL certified for safety and sanitation compliance, these upright freezers provide a dependable solution for restaurants, grocery stores, cafés, and retail operations requiring consistent and efficient frozen storage.

ETL Sanitation



This product has been certified by ETL, a division of the Intertek Group, to meet applicable sanitation standards required for use in the United States and Canada.

5-15P



This unit comes with a NEMA 5-15P plug

ETL, US



This product has been certified by ETL, a division of the Intertek Group, to meet applicable electrical product safety standards required for use in the United States.