



HURAKAN

Freezer

Reach-In

HKN-MRC37F2S

Item #: HKN-MRC37F2S Project: _____

Qty: _____ Date: _____ Approval: _____



Features

- Pre-coated steel exterior, aluminum interior
- Ventilated cooling system for uniform freezing
- Digital CAREL thermostat for precise temperature control
- Operating temperature range: 0°F to -8°F
- Vertical LED interior lighting (two sides & mullion)
- Sliding self-closing glass doors
- Heated double-pane tempered glass
- Adjustable painted wire shelves
- Eco-friendly refrigerant R290, ETL certified

Technical Data

Width	53 $\frac{7}{8}$ Inches
Depth	29 $\frac{1}{8}$ Inches
Height	82 $\frac{7}{8}$ Inches
Power Cord Length	118 Inches
Interior Width	49 $\frac{3}{8}$ Inches
Interior Depth	23 $\frac{1}{4}$ Inches
Interior Height	60 $\frac{3}{8}$ Inches



ETL, US



5-15P



ETL Sanitation

Instructions and images in this manual are only for reference and may differ from the actual product. Launch the E-Manual.



Technical Data


Hertz / Phase / Voltage	60 Hertz / 1 Phase / 110 V
Approval / Climate Class	ETL certified / Climate Class 3
Cooling Type	Ventilated
Capacity	35.7 cu.ft.
BTU (LBP)	1364 BTU
Evaporator	Finned Aluminum
Compressor	Cubigel x2
Construction	Steel painted / Aluminum sheet
Door Style / Type	Sliding (self-closing) / Glass
Interior Light	LED, two sides
Handle / Lock	External / Yes
Installation Type	Free Standing
Horsepower	1/3 HP
Amps	4.6 A
Number of Doors	2 Doors
Number of Shelves	8 (white painted wire)
Plug Type	NEMA 5-15P
Wheels/Casters	4
Refrigerant Type	R-290
Style	Counter Height
Temperature Range	0°F to -8°F
Style / Type	Vertical / Reach-In Freezer



HURAKAN

FREEZER
REACH-IN
HKN-MRC37F2S

Plan View

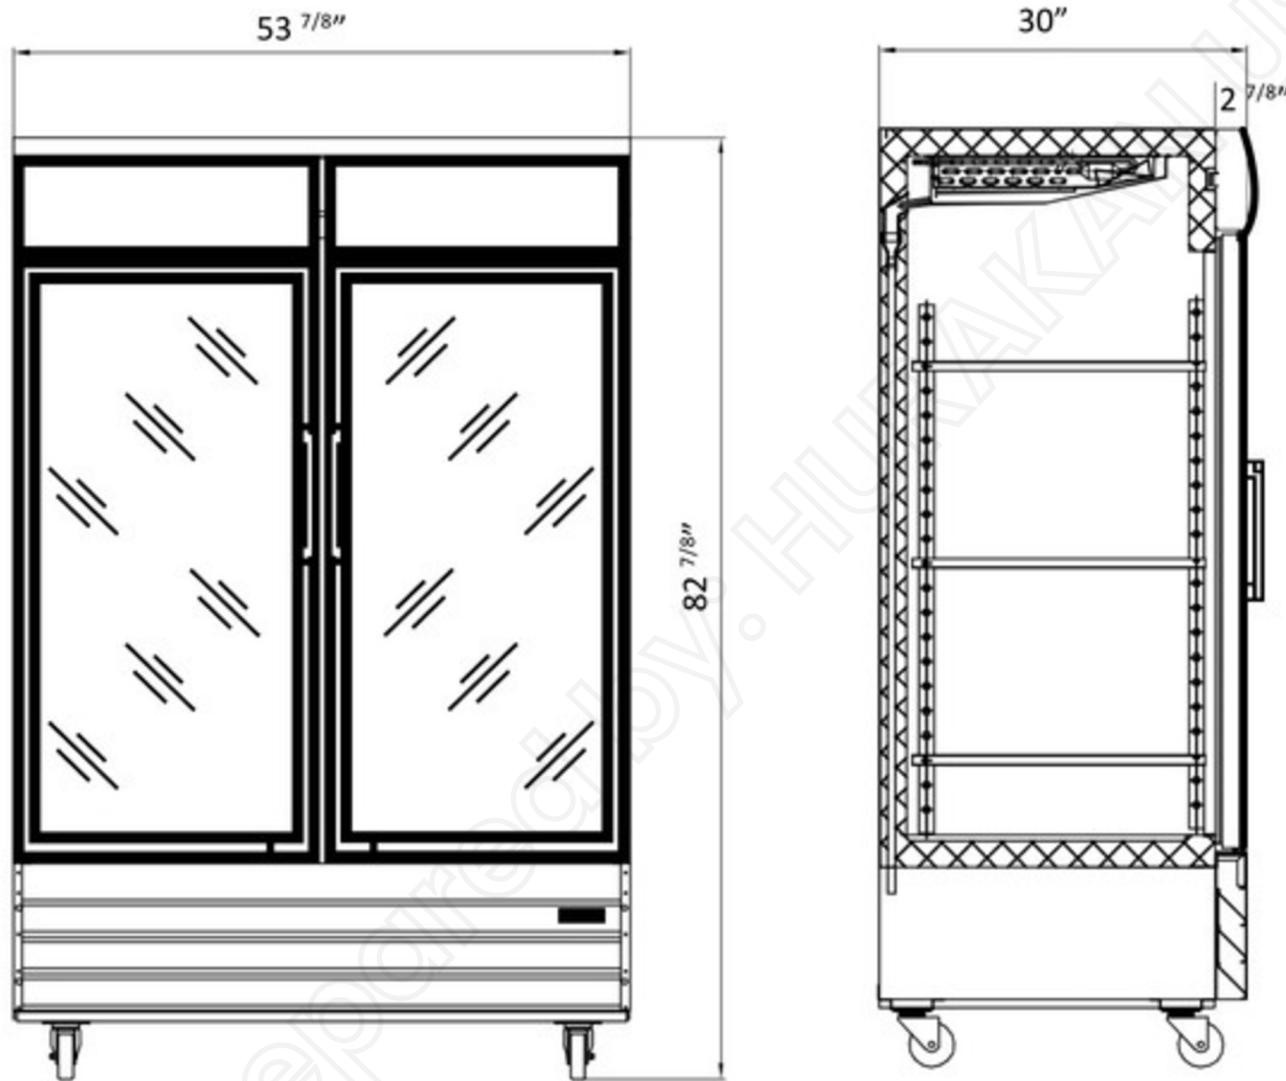



Notes & Details

These commercial upright freezers are designed to meet the demands of professional foodservice and retail environments, combining durability, reliable freezing performance, and a clean, modern appearance. Available in one-door and two-door configurations, each unit features a heavy-duty steel-painted exterior and an easy-to-clean aluminum interior. The units are equipped with sliding double-pane tempered glass doors, providing excellent thermal insulation, clear product visibility, and convenient access in high-traffic or limited-space environments. Integrated vertical LED lighting ensures frozen products are clearly visible and attractively displayed from any angle.

A bottom-mounted compressor enhances system efficiency while allowing for a more accessible interior layout. The ventilated freezing system ensures uniform cold air circulation throughout the cabinet, supporting stable and consistent low-temperature performance. A digital CAREL thermostat provides precise temperature control within a freezing range of -18°C to -22°C (0°F to -8°F), making the unit suitable for frozen foods, ice cream, and other temperature-sensitive products. Adjustable white painted wire shelves allow flexible product organization, while self-closing sliding doors help minimize cold air loss and reduce energy consumption.

Additional features include an external handle for smooth door operation, built-in door locks for product security, and four heavy-duty casters for easy mobility and positioning. The freezer operates with an environmentally friendly R290 refrigerant, meeting modern energy and environmental standards. ETL certified for safety and performance compliance, these upright freezers are a dependable solution for grocery stores, convenience stores, cafés, restaurants, and retail establishments requiring efficient and visually appealing frozen storage.

ETL Sanitation



This product has been certified by ETL, a division of the Intertek Group, to meet applicable sanitation standards required for use in the United States and Canada.

5-15P



This unit comes with a NEMA 5-15P plug

ETL, US



This product has been certified by ETL, a division of the Intertek Group, to meet applicable electrical product safety standards required for use in the United States.