HURAKAN
COMMERCIAL KITCHEN EQUIPMENT

Data Sheet 2026
HKN-PZ70R2S

PIZZA PREP TABLE

REFRIGERATED



33–41°F	2	20.9 cu. ft.	R290
TEMPERATURE RANGE	DOORS	CAPACITY	REFRIGERANT

FEATURES

- Ventilated cooling system for consistent temperature distribution.
- Environmentally friendly R290 refrigerant.
- Automatic defrost system.
- Digital CAREL temperature controller.
- HUAYI NUG90NR compressor.
- Two plastic-coated wire shelves.
- Four casters, including two with brakes.
- Finned aluminum evaporator and condenser.
- Evaporator and condenser fans included.
- 115 V / 60 Hz power supply; climate class 3.

TECHNICAL DATA

Width	67.1"
Depth	32.3"
Height	40.85″
Net Capacity	20.9 cu. ft. / 592 L
Number of Doors	2
Number of Shelves	2
Cooling System	Ventilated
Temperature Range	33–41°F

2026 Hurakan

Technical Data

Field	Value
Model	HKN-PZ70R2S
Item Name	Refrigerated Pizza Prep Table
Width	67.1"
Depth	32.3"
Height	40.85″
Net Capacity	20.9 cu. ft. / 592 L
Number of Doors	2
Number of Shelves	2
Cooling System	Ventilated
Temperature Range	33–41°F
Refrigerant	R290
Defrost Type	Automatic
Compressor	NUG90NR (HUAYI)
Controller	Digital / CAREL
Voltage / Frequency	115 V / 60 Hz
Casters	4 (2 with brakes)
Packing Size	68.9" × 34.3" × 45.1"


Notes & Details

The HURAKAN HKN-PZ70R2S offers a wider preparation area and 20.9 cu. ft. of refrigerated storage for commercial pizza kitchens. Two doors provide access to the cabinet, with two plastic-coated wire shelves for organizing ingredients. Ventilated cooling, R290 refrigerant and automatic defrost support daily operation.
The refrigeration system combines a HUAYI NUG90NR compressor, a digital CAREL controller, and finned aluminum evaporator and condenser with fans. Four casters, including two with brakes, allow the unit to be moved for cleaning and secured for use. Electrical supply: 115 V / 60 Hz. Climate class: 3.

Data prepared by: HURAKAN USA

2026 Hurakan

Plan View

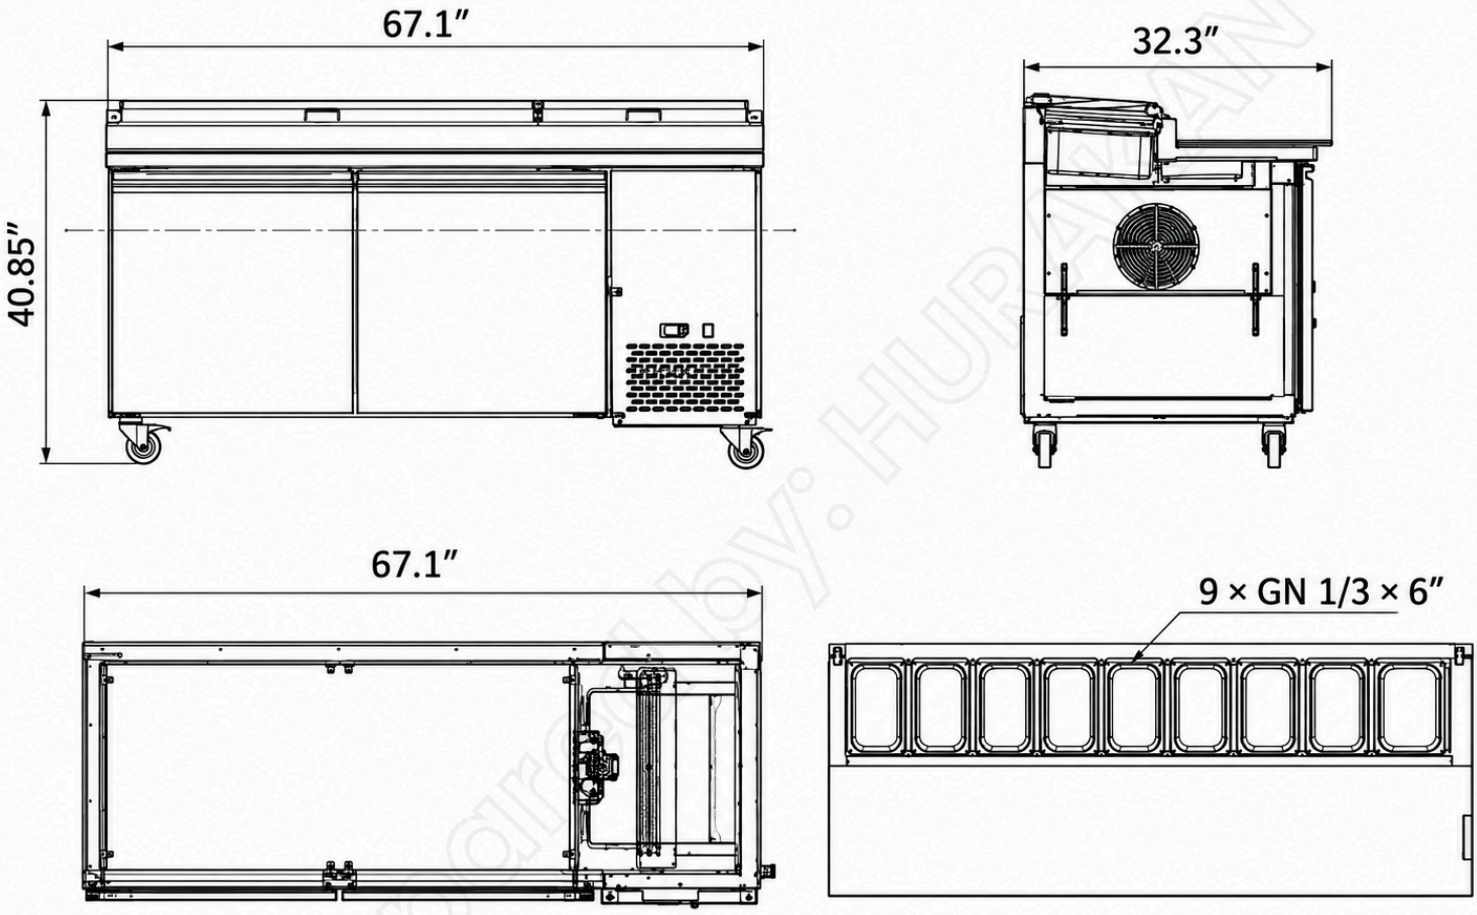

DRAWING NOTES

All dimensions are shown in inches.
Drawings are provided for reference only.
Specifications are subject to change without notice.
Confirm installation clearances before setup.

Intertek
ETL Sanitation

Intertek
ETL, US Electrical Safety

5-15P
NEMA 5-15P Plug Type

Data prepared by: HURAKAN USA

2026 Hurakan